

LifePoint Duo

- **Non-Penetrating** to preserve rooftop water integrity.
- Tie-off points for (1) Fall-arrest and (1) Fall-Restraint
- Easy to reposition



The LifePoint Duo is the perfect solution for 2 person fall protection when circumstances require non-penetrating versatility. LifePoint provides the answer with an easy to set up and quick-move solution.

Non-Penetrating Versatility: Protect workers AND maintain rooftop water integrity with LifePoint Duo. No claws or projectiles to damage the roof surface. The simple weight box design provides OSHA Compliance with minimum components to maintain or inspect.

2 Anchorage Capability: LifePoint Duo provides fall protection anchor points for the following:
(1) Person Fall Restraint and
(1) Person Fall Arrest OR (2) Person Fall Restraint


Mobility: LifePoint Duo can be repositioned in a few minutes by one person. With the patented pivoting frame design, by moving the handle to the transport position, the weight box is lifted and can be easily wheeled to the next location. Then simply move the handle to the work position, the weight box is lowered and the wheels are raised.

Built to Last: With galvanized and powder coated corrosion resistant components and few moving parts, LifePoint will perform for years.



Tie off points for Fall Arrest and Fall

LIFEPOINT DUO FEATURES

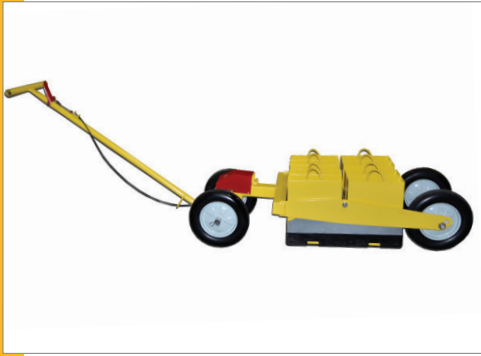


Move LifePoint Duo handle into travel position. Move unit into position.



Press handle release and lower weights into working position.



Connect lanyard to either Fall-Restraint or Fall-Arrest.

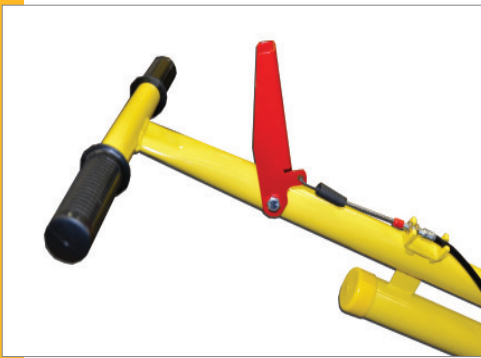

Handle Release



Cast weights or cans available.



Flat-Free rubber tires.

SPECIFICATIONS

Description	Specificaton
Empty weight	200 lbs.
Loaded weight	930 lbs.
Dimensions with handle retracted	70"= (L), 28"= (W), 20"= (H)
Dimensions with handle extended	190"= (L), 28"= (W), 42"= (H)
Tires	Flat Free Solid

- Due to continuous improvement, specifications are subject to change without notice.

- Powdercoated frame
- Galvanived weight pan with durable rubber bottom.
- Tie-off points for:
(1) person Fall Restraint rated AND
(1) person Fall Arrest rated

Meets OSHA 1926.502(d) (16) (IV) Fall Arrest

GARLOCKSAFETY.COM
Customer Support: (877) 791-4446
General Number: (763) 694-2624
Email : info@garlocksafety.com



Distributed by:

