

ScreenGuard Skylight Protection System




ScreenGuard

Easy Mounting, OSHA-compliant solution to limit your liability and protect your employees.

New Simplified compression fit design means no mechanical fasteners penetrate either the roof or the skylight maintaining water integrity of the roof. Galvanized for resistance to the elements.


- Affordable Protection
- Meets OSHA 1910.23(a) (4) and 1926.501 (b) (4). Withstands up to 450 pounds of dynamic force.
- Standard and custom sizes available.
- Compression fit to the skylight frame to maintain watertight integrity. Does not contact roof.
- Galvanized to resist corrosion.

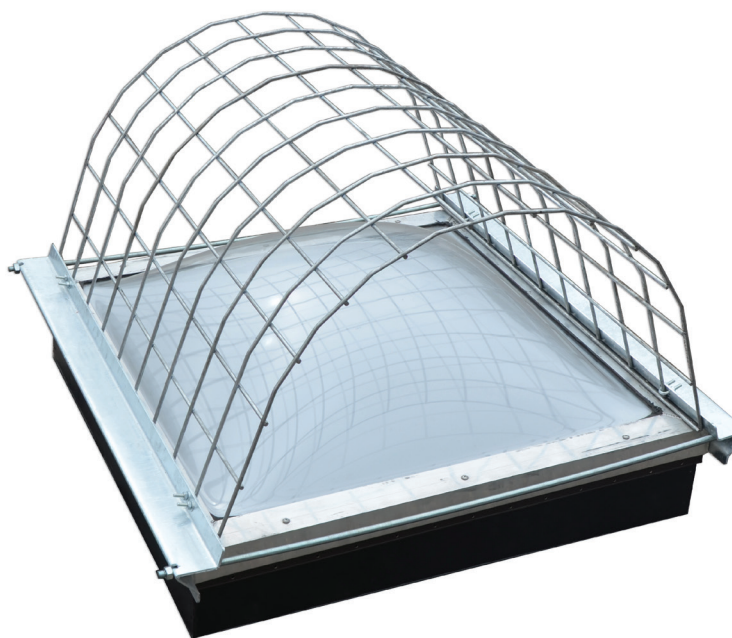

ScreenGuard Features:



Rugged Compression Fit Design

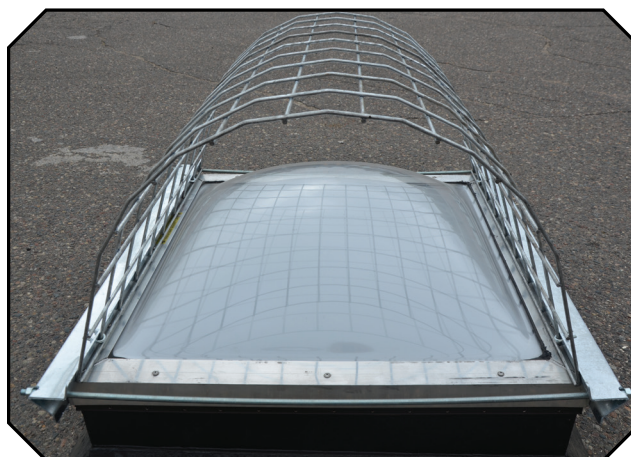

Ample Skylight Dome Clearance

SPECIFICATIONS


Standard Sizes	A	B	C
2424	7"	24"	24"
2828	8"	28"	28"
2852	8"	28"	52"
3636	10"	36"	36"
3652	10"	36"	52"
3676	10"	36"	76"
4242	12"	42"	42"
4280	12"	42"	80"
5252	14"	52"	52"
5276	14"	52"	76"
5296	14"	52"	96"

*Due to continuous improvement, specifications are subject to change without notice.

- Custom Sizes also available.

Meets OSHA 1910.23(a) (4),
1926.501(b) (4), CAL OSHA 3212(e)

Distributed By:

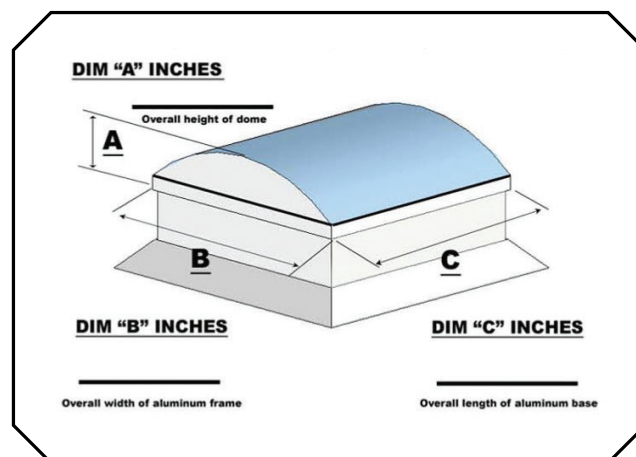

Measurement Guide



FULL PRODUCT LINE



www.garlocksafety.com

2601 Niagara Lane North Plymouth, MN 55447
(877) 791-4446 / P: (763) 694-2624 / F: (800) 820-3268