

Rollback Safety Gate



RollBack Safety Gate

A free standing version of our popular Rollback Bay gate to protect workers on elevated access points for material transfer. Easy-to-use and install. Protects without hindering productivity. Two-gate system means one gate is always closed and OSHA compliant fall protection is in place.


- Prevents falls from elevated access loading points while transferring material loads.
- Heavy duty chains and roller tracks ensure long life and smooth operation.
- Counteracting gates create a safe zone for loading/unloading areas
- When inboard gate is opened, leading edge gate automatically closes.
- Adjustable rails to accommodate unforeseen job site conditions.
- Models available to accommodate single or multiple pallet loading.



ROLLBACK SAFETY GATE FEATURES



1. Gate closed on inboard side.
Gate open on leading edge side.
Place pallet into receiving area.

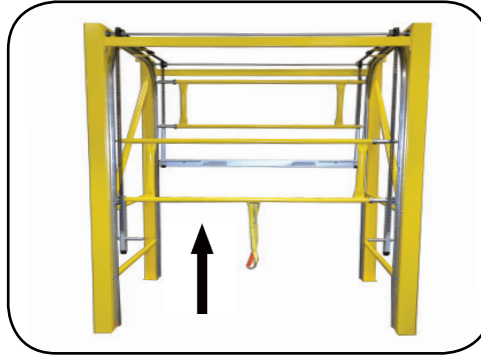

2. As inboard gate is opened,
leading edge gate automatically
closes.




3. As inboard gate fully opens,
leading edge gate is fully closed
maintaining fall compliance.



Zinc plated tracks and hardware



Integrated toe-board on leading edge gate.

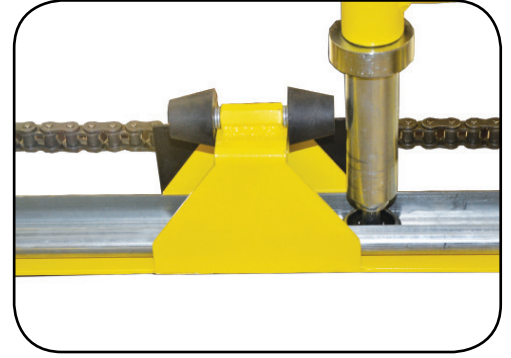

HD rubber gate stops.

SPECIFICATIONS

Description	Pallet Capacity**	Outside Dimensions			Loading Zone Dimensions		
		L	W	H	L	W	H
301348-6060	(1) wide, (1) deep	70"	70"	108"	60"	60"	84"
301348-7260	(1) wide, (1) deep	82"	70"	108"	72"	60"	84"
301348-9660	(2) wide, (1) deep	106"	70"	108"	96"	60"	84"
301348-10860	(2) wide, (1) deep	118"	70"	108"	108"	60"	84"
301348-60102	(1) wide, (2) deep	70"	112"	108"	60"	102"	84"
301348-72102	(1) wide, (2) deep	82"	112"	108"	72"	102"	84"
301348-96102	(2) wide, (2) deep	106"	112"	108"	96"	102"	84"
301348-108102	(2) wide, (2) deep	118"	112"	108"	108"	102"	84"

* Due to continuous improvement, specifications are subject to change without notice.
** Std. 48"x 48" pallet used for Pallet Capacity calculation.

- Tracks and hardware zinc plated.
- Frame and Gates powdercoated yellow.
- Gate Top rail height = 42"
- Gate Lower rail height = 20"
- Custom sizes also available.

FULL PRODUCT LINE



Meets OSHA 1910.23(C) and ANSI 6.4.3

Distributed By:



HINES
CORPORATION
COMPANY



www.garlocksafety.com

2601 Niagara Lane North Plymouth, MN 55447
(877) 791-4446 / P: (763) 694-2624 / F: (800) 820-3268