

MOTORIZED DEWAR CART




MOTORIZED DEWAR CART



SPECIFICATIONS	
Capacity	1100 lbs.
Capacity, 3:1 Ramp	750 lbs.
Weight	340 lbs.
Speed (FWD/REV)	3.8 / 2.5 mph
System Voltage	36 Volts DC
Payload	20", 26" Dewars Up to 4 High Pressure Cylinders
Range (Continuous/Intermittent)	3 hrs. / 8+ hrs.
Recharge Time	3-6 hrs.

MODEL SHOWN
MDC90B1

DIMENSIONS

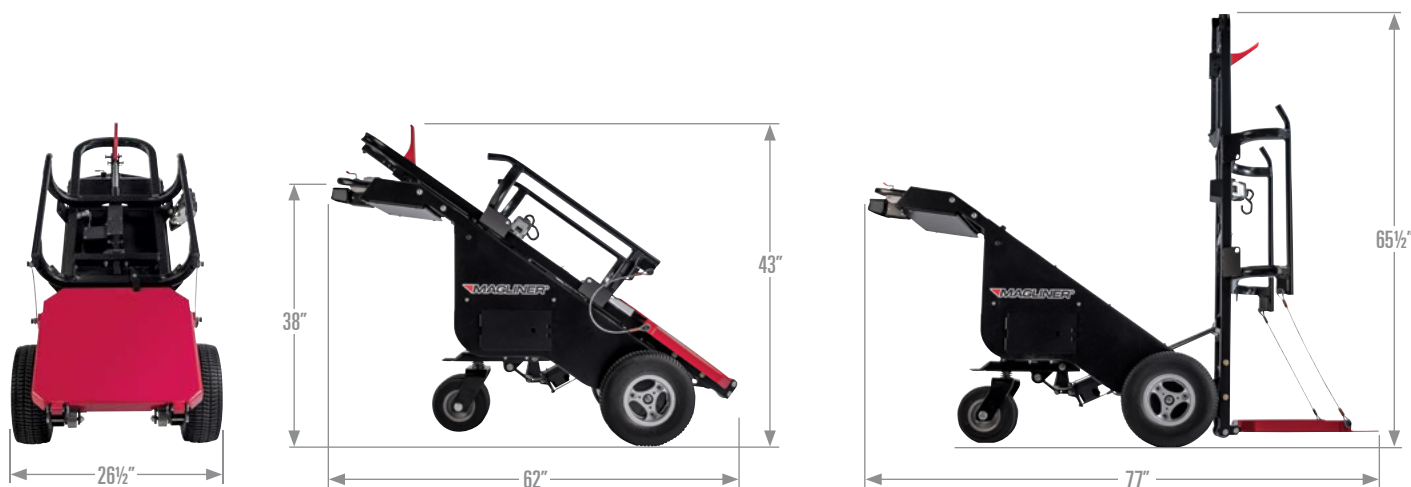

DRIVE WHEEL OPTIONS



Foam filled tire is maintenance free.



Tube-type pneumatic tire.

P/N	D"	WT.(LBS.)
10993	13	10

P/N	D"	WT.(LBS.)
10992	13	8

ACCESSORIES



Battery box assembly complete with three 12V batteries (36V total).

P/N	WT.(LBS.)
460097	35.8



Retractable ratchet strap has 3300 lbs. maximum load and 1100 lbs. working load capacity.

P/N	L'	W"	WT.(LBS.)
450024	10	2	2.8



HP cylinder retention bar secures up to 4 cylinders to prevent shifting.

P/N	WT.(LBS.)
460180	6.8

MOTORIZED DEWAR CART

SAFETY FEATURES



MOTORIZED DEWAR CART

PRODUCTIVITY GAINS

The Magliner Dewar cart moves cylindrical products at speeds up to 3.8 mph, and 2.5 mph in reverse. Average load time is 40 seconds, and unload time 45 seconds.



round and square base

20" AND 26" DIAMETER DEWAR

Halo hook is primary retention, retractable strap is redundant.



HIGH PRESSURE CYLINDERS

Retractable strap is primary retention, optional cylinder bar offers stabilization.

VERSATILITY

4" adjustable extension for a total of 12" of vertical hook travel. Enough to pick the tallest 20" Dewars and shortest 26" Dewars.

Two halo hooks are standard. One for 20" and one for 26" Dewars. Only takes seconds to switch.

No user certification required.



Weather-Proof Storage/Tool Box.

MAGLINER®

magliner.com

Magline, Inc.
1205 West Cedar Street | Standish, MI 48658
1.800.MAGLINE (624.5463)
(989) 512.1000 (Outside U.S. & Canada)
Fax: (989) 803.5941