

POWERED STAIR CLIMBING HANDTRUCK

Faster, Safer Deliveries on Stairs



P/N
CLK170EGS4



P/N
CLK140EGS4

- Lightweight aluminum construction and ergonomic design promote proper posture and reduce awkward movements by operator
- Takes only 1.5 hours to charge a totally discharged battery to 90%
- Sliding clutch and electronic overload protection
- Reduces force needed to move loads up and down stairs
- Curved-back frame for kegs and cylinders
- Power assist in climbing and descending modes
- Multiple ascent speeds



P/N
CLK110FNG4


SPECIFICATIONS

	CLK170EGS4	CLK140EGS4	CLK110FNG4
Capacity	375 lbs.	300 lbs.	240 lbs.
Maximum speed (steps per minute)	29	35	48
Weight (without battery)	35 lbs.	35 lbs.	35 lbs.
Maximum step height	8"	8"	8"
Overall height	62"	62"	38-1/2" folded 60" unfolded
Width	19"	19"	19"
Depth	18" to 24" depending on nose	18" to 24" depending on nose	11-1/2" folded
Battery capacity approximate steps (with maximum load)	220 steps	220 steps	220 steps
Battery capacity approximate steps (with half-load)	300 steps	300 steps	300 steps

ACCESSORIES

To fit every need

NOSES

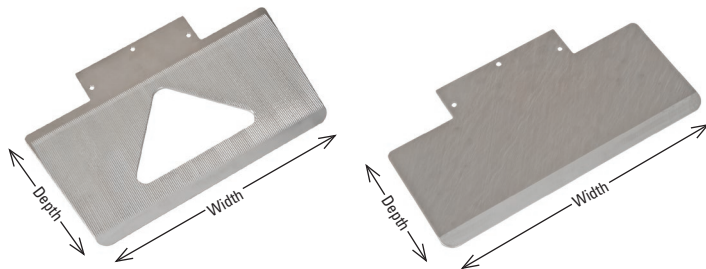

P/N	W"	D"	WT.(LBS.)
930030	18.8	9.4	4.0
930018	14	7	2.25
930003	16.5	13.4	4.0

Grooved nose plate with beveled edge slides easily under loads.

P/N	W"	D"	WT.(LBS.)
930085	17.7	7.5	4.0
930084	18.8	9.4	5.0

Solid nose plate with beveled edge slides easily under loads.

WHEELS



P/N	D"	WT.(LBS.)
030245	10	2.75

10" 4-ply tubed pneumatic wheel with precision bearings.



P/N	D"	WT.(LBS.)
930148	10	2.75

10" non-marking microcellular, puncture-proof wheel with precision bearings.

ACCESSORIES



P/N	WT.(LBS.)
930145 Full Kit	0.5
930140 Clip Only	0.5

Battery securing clip holds the battery firmly in place in high impact situations.



P/N	WT.(LBS.)
930114	2.0

In-transit DC battery charger conveniently charges using the vehicle's lighter.




P/N	L"	WT.(LBS.)
930006	56	0.5
930007	100	0.5

Containment strap holds product securely in place during transport.



P/N	WT.(LBS.)
930108	1.0

Keg hook holds keg in place securely during delivery.

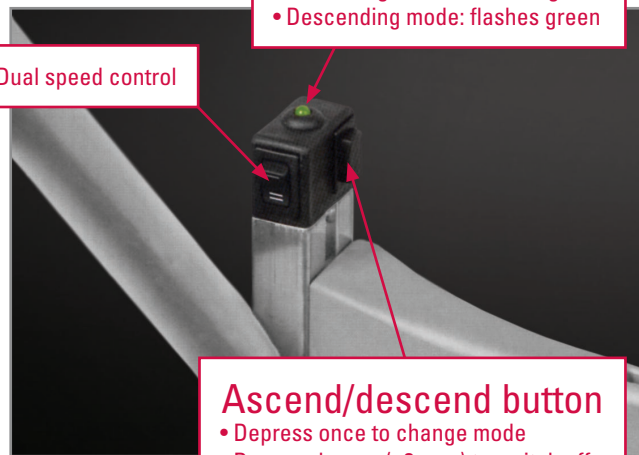

Indicator lamp

- Ascending mode: constant green
- Descending mode: flashes green

Dual speed control

Ascend/descend button

- Depress once to change mode
- Depress longer (>3 sec.) to switch off