

CoolLift®



 **MAGLINER®**

1-800-MAGLINE (624-5463)
www.magliner.com

CoolLift®



- More cases per transport increase productivity
- Hydraulic dual wheel disc brake system
- Center tilt design navigates easily over thresholds and bumps
- 360° maneuverability in store aisles and most coolers
- 24-volt battery system may be charged from a standard wall unit or on board a delivery vehicle
- Non-marking, 6"x2" thermoplastic rubber casters
- Three point deck support increases pallet stability

U.S. Patent #8,282,111 8,894,076


SPECIFICATIONS <i>Lift Only Models</i>				
P/N	SIZE (L X W X H)	WEIGHT (LBS.)	CAPACITY (LBS.)	CASE LOAD
CTA43	56" x 19" x 62"	230	1,200	40
CTA48	56" x 19" x 62"	230	1,350	45
CTA53	56" x 19" x 62"	222	1,500	50

Propulsion models only:

- Propulsion option provides forward and reverse speed at 2 mph
- Interlock button on throttle minimizes accidental activation of propulsion system

SPECIFICATIONS <i>Models With Propulsion</i>				
P/N	SIZE (L X W X H)	WEIGHT (LBS.)	CAPACITY (LBS.)	CASE LOAD
CPA43	63" x 19" x 62"	346	1,200	40
CPA48	63" x 19" x 62"	346	1,350	45
CPA53	63" x 19" x 62"	338	1,500	50

PALLETS

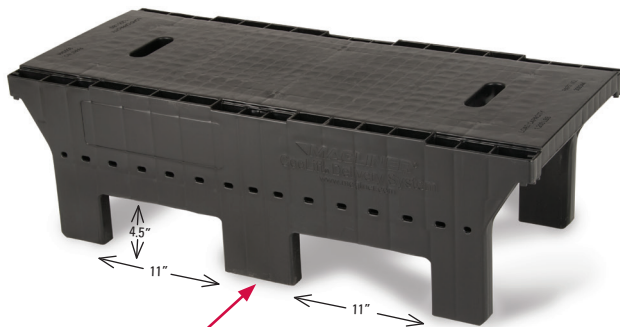


Fits all standard fork truck and electric pallet truck tine widths.

- Empty pallets interlock, optimizing warehouse and delivery vehicle storage space inside delivery vehicle
- Pallets self-align and interlock with the CoolLift deck when raised for safe, secure product movement during delivery
- Pallets integrate with warehouse automation systems, and warehouse personnel can pick and load/unload multiple pallets simultaneously using the optional pallet adaptor available for forklifts and walkie riders

SPECIFICATIONS				
P/N	SIZE (L X W X H)	WEIGHT (LBS.)	CAPACITY (LBS.)	CASE LOAD
309344	43" x 18.5" x 13.5"	25	1,200	40
309345	48" x 18.5" x 13.5"	29	1,350	45
309346	53" x 18.5" x 13.5"	32	1,500	50

PALLET EXTENSIONS

- Components made of impact-resistant high-density polyethylene (HDPE) for years of use
- Extensions firmly press-fit into pallet legs



P/N	DESCRIPTION	WT. (LBS.)
309722	for 43" pallets (309185 & 309344)	1.5
309723	for 48" pallets (309186 & 309345)	2.0
309724	for 53" pallets (309187 & 309346)	2.5

ACCESSORIES

ERGO CO₂ CONTAINMENT RACK



Specifically designed to interface with any size CoolLift pallet. No hardware required; rack legs slide into pallet slots.

CO₂ RACK SPECIFICATIONS

P/N	SIZE (L X W X H)	WT
309316*	45-3/4" x 18-1/2" x 41-3/4"	47.5 lbs.

*Pallet not included. Ships complete with 8" E-Track strap.

CURB RAMP



P/N
RDCR

- Gain entry to building when an access ramp is unavailable.
- Sturdy, lightweight aluminum construction is easily handled by one person.
- Twin-tooth deck design provides traction in either direction for safer delivery.

SPECIFICATIONS

Capacity	3,000 lbs.
Usable width	26"
Overall width	29"
Overall length	44"
Height range	9"
Weight	43 lbs.

HANDLE OPTION



P/N	WT.(LBS.)
309330	5.0

Lift assist handle provides additional leverage for maneuvering uneven tailgates and terrain.

ACCESSORY BAG



P/N	SIZE (L X W)	WT.(LBS.)
309256	10" x 18"	.25 lbs.

Perfect for hand-held computers and printers.

CooLift®

PALLET ADAPTER FOR USE WITH FORK TRUCK AND WALKIE-RIDER



- Rugged, heavy-duty steel construction
- Adjustable fork tine pockets accommodate both pallet jacks and fork trucks
- Minimum of 1" gap between fork pockets when loaded stops stretch wrap from rubbing
- Pallets rest against fork truck tines (or pallet jack battery box) so a separate "back stop" is not needed



- 1-1/2" offset design allows each pallet to be set down individually

PART NUMBER	WEIGHT	CAPACITY (LBS.)
309190 adapter for 43" and 48" pallets	335 Lbs.	2,400
309190L 43" and 48" pallet adapter with legs	371 Lbs.	2,400
309214 adapter for 53" pallets	350 Lbs.	3,000
309214L 53" pallet adapter with legs	438 Lbs.	3,000



- Permanently attached 1/4" safety chain fastens easily to fork truck
- 1/2" gap allows proper alignment of pallets built with product overhang




- Retracting leg option available for easy storage of the pallet adapter when using a walkie rider

Patent - www.magliner.com/patents

COLLAPSIBLE PALLET PICKING ADAPTER FOR WALKIE-RIDERS ONLY

Increase warehouse efficiency and save valuable floor space by using the same pallet moving equipment for both CooLift and conventional pallets.

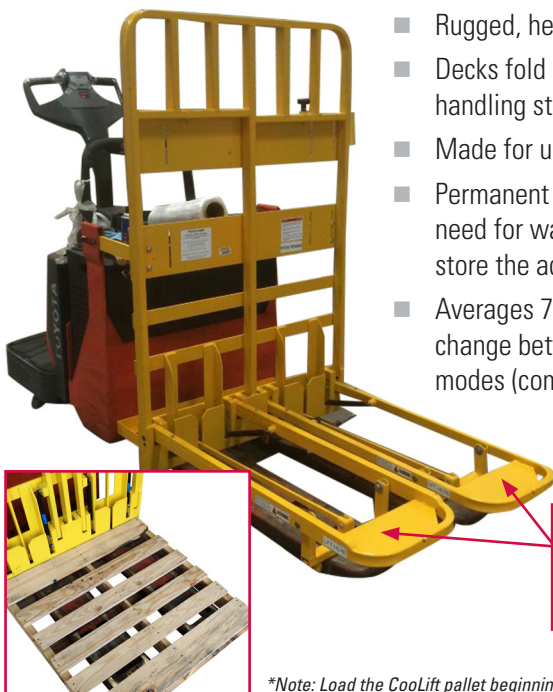

- Rugged, heavy-duty steel construction
- Decks fold up when not in use for handling standard stringer pallets
- Made for use with any size CooLift pallet
- Permanent installation eliminates need for warehouse space to store the adapter
- Averages 75% less time to change between CooLift pallet and conventional pallet modes (compared to removable pallet adapter models)

Dampering feature controls deck lowering

Bulk head design does not obstruct driver visibility or allow product to fall through



Non-binding link system provides smooth movement between deck positions - only 15 lbs. of force needed to lift each deck

Platform is offset vertically by 1-1/2" to allow each pallet to be set down individually

**Note: Load the CooLift pallet beginning at the bulkhead and cube outward to avoid tipping.*

Patent - www.magliner.com/patents

SPECIFICATIONS	
Overall Depth (collapsed)	2-1/2"
Height	60"
Width	37-1/8"
Weight	220 lbs.
Capacity	3,000 lbs.

www.magliner.com

MAGLINER®

Magline, Inc. ■ 1205 West Cedar Street ■ Standish, MI 48658
1.800.MAGLINE (624.5463) ■ (989) 512.1000 (Outside U.S. & Canada) ■ Fax: (989) 803.5941

© COPYRIGHT 2017-2018, MAGLINE, INC. – FORM B9382