



Seal Spray Foam

HIGH PERFORMANCE SPRAY FOAM



**Contents
Under
Pressure**



**Highly
Flammable**



**Avoid Inhalation
+ Skin Contact**

DANGER

Extremely flammable aerosol. Pressurized container: May burst if heated. Harmful if swallowed or inhaled. May cause skin irritation or an allergic skin reaction. Causes serious eye irritation.

FIRST AID

IF ON SKIN: Wash with plenty of soap and water.

IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Consult doctor as quickly as possible with SDS of product available.

Additional instructions and SDS available at www.sealsprayfoam.com

USES

For installation and sealing of doors, windows, insulation board and other construction details. Filling of gaps and cavities. Thermal and sound insulation.

TECHNICAL SPECIFICATIONS

Working temperature of the can +41°F... +77°F, air temperature in application +41°F... +86°F, best result at +68°F.

SURFACE PREPARATION

Surface should be free of dust, dirt, grease, and any oils

INSTRUCTIONS

Connect the can with the gun and shake well. For best results, lightly moisten the surfaces before application. Adjust the amount of foam with the gun trigger. Store in an upright position at temperature +41°F to +77°F. This product should not be used in areas with poor ventilation unless a protective mask with an appropriate gas filter is used.

Place the provided nozzle onto the applicator barrel tip.



PELIGRO

Aerosol extremadamente inflamable. Recipiente a presión: puede explotar si se calienta. Nocivo por ingestión o inhalación. Puede causar irritación en la piel o una reacción alérgica en la piel. Causa irritación ocular grave.

PRIMEROS AUXILIOS

EN CASO DE CONTACTO CON LA PIEL: Lave con abundante agua y jabón.

SI SE INHALA: Lleve a la víctima al aire fresco y manténgala en reposo en una posición cómoda para respirar.

SI EN LOS OJOS: Enjuague cuidadosamente con agua durante varios minutos. Quite las lentes de contacto, si están presentes y son fáciles de hacer. Continuar enjuagando.

Consulte al médico lo más rápido posible con la SDS del producto disponible.

Instrucciones adicionales y SDS disponibles en www.sealsprayfoam.com

USOS

Para la instalación y sellado de puertas, ventanas, paneles de aislamiento y otros detalles de construcción. Relleno de huecos y cavidades. Aislamiento térmico y acústico.

ESPECIFICACIONES TÉCNICAS

Temperatura de trabajo de la lata + 41 ° F ... + 77 ° F, temperatura del aire en aplicación + 41 ° F ... + 86 ° F, el mejor resultado a + 68 ° F.

PREPARACIÓN DE SUPERFICIE


La superficie debe estar libre de polvo, suciedad, grasa y aceites.

INSTRUCCIONES

Conecte la lata con la pistola y agite bien. Para mejores resultados, humedezca ligeramente las superficies antes de la aplicación. Ajuste la cantidad de espuma con el gatillo de la pistola. Almacene en posición vertical a una temperatura de + 41 ° F a + 77 ° F. Este producto no debe usarse en áreas con poca ventilación a menos que se use una máscara protectora con un filtro de gas apropiado.



SPRAY FOAM INSULATION

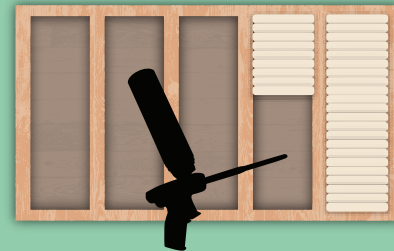

- Two component foam performance in an easy to use one component format
- Insulates to prevent energy loss
- Keeps drafts, pests, and moisture out
- Superior flame spread index of 15

INTERTEK CLASSIFIED CAULKING AND SEALANTS

Surface Burning Characteristics Applied
to Inorganic Reinforced Cement Board
Flame Spread 15 Smoke Developed 150

*Tested and applied in three 3/4 in. diameter beads 5 inches on center covering 12.5% of the exposed test sample area. The material is packaged under pressure. Investigation did not include evaluation of either the pressurized containers or the material prior to dispensing.

Refer to SDS at
www.sealsprayfoam.com

Manufactured for:
Seal Spray Foam
5717 Salmen St. New Orleans, LA 70123
504-734-1315

Referirse a SDS a
www.sealsprayfoam.com

Fabricado para:
Seal Spray Foam
5717 Salmen St. New Orleans, LA 70123
504-734-1315

HIGH PERFORMANCE SPRAY FOAM

30 oz.

DANGER! FLAMMABLE. IRRITANT. CONTENTS UNDER PRESSURE.
Read warnings on back of can.