




R590006-R

Arc Flash Baseline Self Retracting Lifeline

FEATURES

- Meets requirements of ASTM F887
- Meets ANSI Z359.14-2021, Class 1
- 1 inch Aramid webbing
- 6 foot working range
- 24 inch maximum arrest distance
- Aluminum housing
- Recessed labels
- Impact Indicator
- Swivel top with steel carabiner included
- Aluminum rebar hook on connecting end
- Snap hooks and carabiners are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating

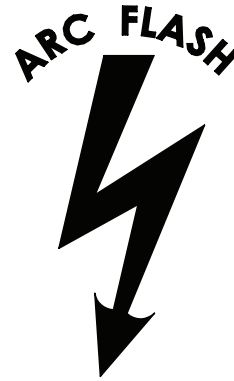

SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Aprox. Weight
R590006-R	Aluminum Rebar Hook	22 in (554 mm)	3 7/16 in (94 mm)	3 in (76 mm)	4.0 lb (1.8 kg)

COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Capacity
ANSI Z359.14-2021 CLASS 1	24 in (610 mm)	900 lbf (4 kN)	1,800 lbf (8 kN)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	24 in (1,067 mm)	N/A	1,800 lbf (8 kN)	400 lbs (181 kg)

*See user instructions for more information.

⚠ WARNING: Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

Technical Data Sheet