




# R430006TB

## Bantam Tie-Back Self Retracting Lifeline

### FEATURES

- 9 foot working range
- 3/4 inch UHMWPE webbing
- Tie-back hook is designed for direct connection to the lifeline
- High Impact Nylon housing
- Swivel top with steel carabiner included
- Tie-back snap hook is self-locking with a minimum tensile breaking strength of 5,000 pounds, and a 3,600 pound gate rating

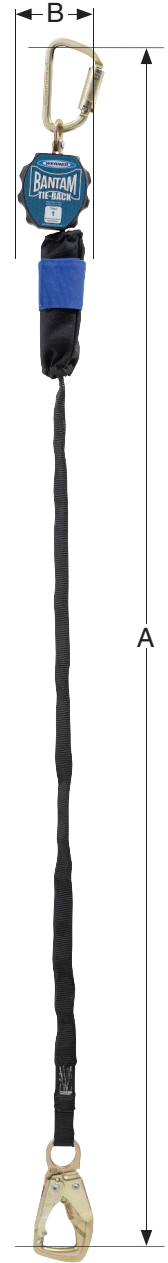

### SPECIFICATIONS

Model No.	Lifeline Connector	(A)	(B)	Depth	Aprox. Weight
R430006TB	Steel Tie-Back Snap Hook	52 3/4 in (1,340 mm)	3 1/2 in (89 mm)	2 9/32 in (58 mm)	2.6 lbs (1.2 kg)

### COMPLIANCE STANDARDS

Meets	Maximum Arrest Distance	Average Arrest Force	Maximum Arrest Force	Free Fall Limit	Capacity
ANSI Z359.14-2021 CLASS 1	24 in (610 mm)	900 lbf (4 kN)	1,800 lbf (8 kN)	24 in (610 mm)	130 - 310 lbs (59 - 141 kg)
OSHA 29 CFR 1910.140 & 1926.502	42 in (1,067 mm)	N/A	1,800 lbf (8 kN)	24 in (610 mm)	400 lbs (181 kg)

**⚠ WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users **MUST** read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet

WERNER CO. CORPORATE HEADQUARTERS: 555 Pierce Rd., Suite 300, Itasca, IL, 60143  
 TEL: 888-523-3371 FAX: (888) 456-8459 www.wernerco.com