
SUPER SIMPLEX DISAPPEARING STAIRWAY WITH DEEP ANGLE FRAME

(USE THIS DRAWING FOR CEILING HEIGHTS BETWEEN 9'-10" TO 12'-0")


ONE INCH FLANGE ALL AROUND TOP & BOTTOM



30" x 64" REQUIRED ROUGH OPENING IN CEILING

SPECIAL DEEP FRAME

1/8" STEEL. 63 DEGREE ANGLE ONE END. 90 DEGREE OTHER END. TO CONTAIN SUPER SIMPLEX FOLDING STAIRWAY CUT FOR EXACT FINISHED CEILING HEIGHT. THIS FRAME, WITH FACTORY INSTALLED BUILT-IN TREADS, PROVIDES STEPS FROM THE DROPPED-CEILING LINE TO THE UPPER FLOOR.




NOTES

DIMENSIONS ON THIS DRAWING PERTAIN ONLY TO CEILING HEIGHTS OVER 9'-9".

MANUFACTURER RECOMMENDS THAT 2 PEOPLE OPEN/CLOSE UNITS INSTALLED IN CEILINGS 11' & OVER.

SHIPS COMPLETELY ASSEMBLED AS ONE UNIT

NOT TO SCALE

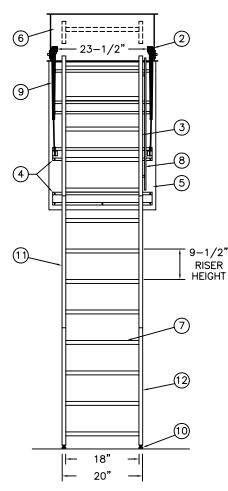

OPTIONS

2 HOUR FIRE RATED **ASSEMBLY**

LOCK ON DOOR PANEL

BELOW BOTTOM OF FRAME EYE **EXACT** POLE OPERATED FLOOR TO **FLOOR HEIGHT CEILING** X (CLEARANCE) BOTH MEASUREMENTS ARE REQUIRED FOR FABRICATION **HEIGHT** (12)**EXACT** 9'-10" to 10'-11' 18" <u>"</u>0 **FINISHED CEILING** 'n 11'-0" to 12'-0" 26" **HEIGHT** TEE-POLE **OPERATED** FLOOR

LADDER LEGEND

LOAD RATING - 500 LBS.

- 1. STEEL PIANO DOOR HINGE
- 2. DOUBLE SPRING ACTION 3. SIDE RUNNER 5" ALUM.
- 4. BATTEN 1/8" ALUM.
- 5. DOOR PANEL 1/8" ALUM.
- 6. STEEL ANGLE FRAME
- 7. TREAD (SERRATED ALUM.)
- 8. HANDRAÌL RIGHT SIDE ONLY
- 9. EXTRA HEAVY OPERATING ARM
- 10. ADJUSTABLE FOOT
- 11. MIDDLE SECTION
- 12. BOTTOM SECTION
- FOLD—ASSIST

S-144-A-30

TOP STEP

LOCATED AT

ONE INCH

T Donaid on Laddon LLC		ARCH'T OR ENG'R.	PROJECT		PRECISION REP
P.O. Box 2279 Morristown, TN 37816-2279		PURCHASE ORDER	WORK ORDER	PURCHASER	SERIAL#
Ph: (423) 586-2265 Fax: (423) 586-2091 www.PrecisionLadders.com	CHECKED BY:	DRAWN BY: JBR	7/27/09	MODEL# SS/AL— QTY.	