

Rear View Camera System with Rear Sensors

Product Manual



Model # RVS-770613-NM-112

What's in the Box?



- 1 x 1/3" Sharp® Color CCD Infra-Red Waterproof Camera
- 1 x 7" LED Digital Panel Color Monitor with Universal Mount/Stand and Wire
- 4 x Waterproof Sensors
- 4 x Rubber Grommets
- 1 x Control Module
- 1 x Y Adapter Power Cable
- 3 x Cable Clips
- 1 x Sensor Cable (13.2' to each sensor)
- 1 x 66' Camera Cable
- 1 x Remote Control
- 1 x Power Harness
- 1 x RCA Adaptor
- 1 x Screw Kit For Installation

Note: minor details may change
based on item configuration

Table of Contents

Introduction	4
Safety Information	5-7
Before Beginning Installation	8
Installation Guide.....	9
Wiring Camera & Monitor.....	10-11
Installation Diagram	12
Wiring Diagram.....	13
Monitor Operation.....	14
Splitting & Splicing	15
Positioning.....	16
Monitor Dimensions.....	17
Monitor Specifications	18
Camera Specification.....	19
Sensors Specifications.....	20
Sensors Installation.....	21-22
Alternate Mounting.....	23-24
Detection.....	25
Troubleshooting.....	26
Warranty.....	31
Disclaimer	32

Introduction

Please read all of the installation instructions carefully before installing the product. Improper installation will void manufacturer's warranty.

Congratulations on purchasing a Rear View Backup Camera System! With this manual you will be able to properly install and operate the unit.

The Backup Camera System is intended to be installed as a supplement aid to your standard rear view mirror that already exists in your vehicle. The Backup Camera System should not be used as a substitute for the standard rear view mirror or for any other mirror that exists in your vehicle.

In some jurisdictions, it is unlawful for a person to drive a motor vehicle equipped with a TV viewer or screen located forward of the back of the driver's seat or in any location that is visible, directly or indirectly, to the driver while operating the vehicle.

Safety Information

Please read the entire manual and follow the instructions and warnings carefully. Failure to do so can cause serious damage and/or injury, including loss of life. Be sure to obey all applicable local traffic and motor vehicle regulations as it pertains to this product. Improper installation will void manufacturer's warranty.

USAGE

- The Rear View Camera System is designed to help the driver safely detect people and/or objects helping to avoid damage or injury. However, you the driver, must use it properly. Use of this system is not a substitute for safe, proper or legal driving.
- Never back up while looking at the monitor alone. You should always check behind and around the vehicle when backing up, in the same way as you would if the vehicle did not have the Rear View Camera System. If you back up while looking only at the monitor, you may cause damage or injury. Always back up slowly.
- The Rear View Camera System is not intended for use during extensive back-up maneuvers or backing into cross traffic or pedestrian walkways.
- Please, always remember, the area displayed by the Rear View Camera System is limited. It does not display the entire panorama that is behind you.

Safety Information

INSTALLATION

- Electric shock or product malfunction may occur if this product is installed incorrectly.
- Use this product within the voltage range specified. Failure to do so can cause electronic shock or product malfunction.
- Take special care when cleaning the monitor.
- Make sure to firmly affix the product before use.
- If smoke or a burning smell is detected, disconnect the system immediately.
- Where the power cable may touch a metal case, cover the cable with a friction tape. A short circuit or disconnected wire may cause a fire.
- While installing the Rear View System be careful with the wire positioning in order to avoid wire damage.
- The Rear View System should only be used when the vehicle is in reverse.
- Do not watch movies or operate the monitor while driving; as it may cause an accident.
- Do not install the monitor where it may obstruct drivers view or obstruct an air bag device.
- Dropping the unit may cause possible mechanical failure.

Safety Information

If you have questions about this product, contact:

Industrial Products

5717 Salmen Street New Orleans, LA 70123
industrialproducts.com | sales@industrialproducts.com
888-243-3339

IN NO EVENT SHALL SELLER OR MANUFACTURER BE
LIABLE FOR ANY DIRECT OR CONSEQUENTIAL DAMAGES OF
ANY NATURE, OR LOSSES OR EXPENSES RESULTING FROM
ANY DEFECTIVE PRODUCT OR THE USE OF ANY PRODUCT.



Before Beginning Installation

Before drilling please check that no cable or wiring is on the other side of the wall. Please clamp all wires securely to reduce the possibility of them being damaged while vehicle is in use. Keep all cables away from hot or moving parts and electrical noisy components.

We recommend doing a benchmark test before installation to insure that all components are working properly.

Step 1: Choose the monitor and camera locations.

Step 2: Install all cables in vehicle, when necessary a 0.8 (20mm) hole should be drilled for passing camera cable through vehicles walls. Install split grommets where applicable.

Step 3: Once all cables and wiring have been properly routed, perform a system function test by temporarily connecting the system. If the system seems to not be operating properly see troubleshooting (page 22).

Cable

1. Be sure to position the cable properly. The camera cable uses aircraft grade connectors which means the camera cable can be exposed to all weather elements. Do not run the cable over sharp edges, do not kink the cable and keep away from HOT and rotating parts.
2. Fasten all cables and secure all excess cable.

Monitor

1. To Attach the Pedestal mount to the dashboard or to the headliner use self-tapping screws and/or the adhesive pad.
2. Attach monitor to mount, and adjust mounting angle to allow optimum driver viewing comfort. (see figure 1.1 on page 12)

Installation Guide

The Power Harness.

- To power the system connect the power (RED) 12V+ wire to ignition power and the ground (BLACK) wire to chassis ground.
- These are the only wires needed to power the entire system and all the cameras. Each camera can be seen at any time by simply pressing the power button and using the V1/2 button to toggle.
- The three positive trigger wires (WHITE-CH1, BROWNCH2, BLUE-CH3) each represent one channel and will turn on their channel when the trigger wire is energized with 12V.
- "Camera 3" is the designated backup channel. To have the the backup camera come on when you go into reverse, connect the BLUE wire to reverse power (or any power source that comes on only in reverse).
- The other channels can simi-

larly be triggered (i.e. side cameras can be triggered by the turn signals etc.)

- To automatically have camera and monitor turn ON when vehicle activates, simply twist BLUE positive trigger 12V+ to Red Power line 12V+ and wire to ignition power.

Note: This setup will disable the menu in channel 3. To access the menu simply move to channel 1 or 2 and all the changes will apply to channel 3.

Note: When the blue wire is active it will have precedence over the other triggers. Therefore, if you wish to use multiple triggers, do not attach the blue trigger to constant power.

Wiring Camera & Monitor

- **Audio:** There is audio on channels 2 and 3. On channel 3 the blue trigger wire must be energized (12V) to activate the audio. On channel 2 the audio is always on.
- **Grid-lines:** The grid-lines are also carried through the blue wire. To use the grid-lines for reversing, connect the blue wire to a reverse power.
- There is a built-in voltage regulator for our systems which can handle 9-32 volts. Real consumption is 10 to 30 Volts.

Note: The camera and monitor can always be activated by manually pushing the power button on monitor. This is in addition to utilizing the positive triggers.

Note: If connecting power directly to battery, the camera is always ON and therefore can drain battery. Therefore it is recommended to connect power to an ignition switched accessory power source.

Installation Diagram

Figure 1.1

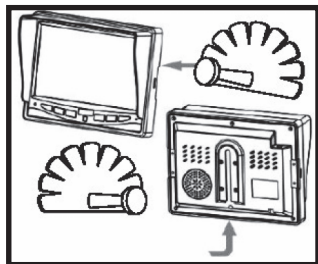


Figure 1.2



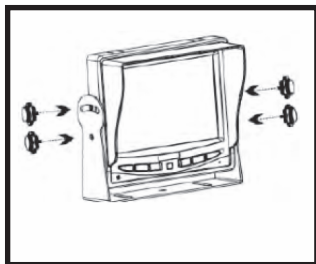


Figure 1.3

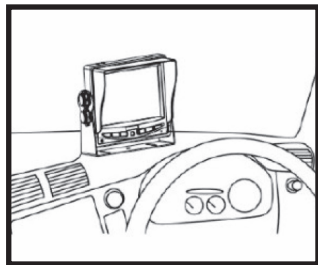


**Connection of U
Bracket**

Figure 1.4




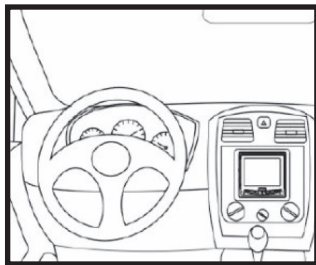


**Connection of
Flushmount Bracket**

Wiring Diagram

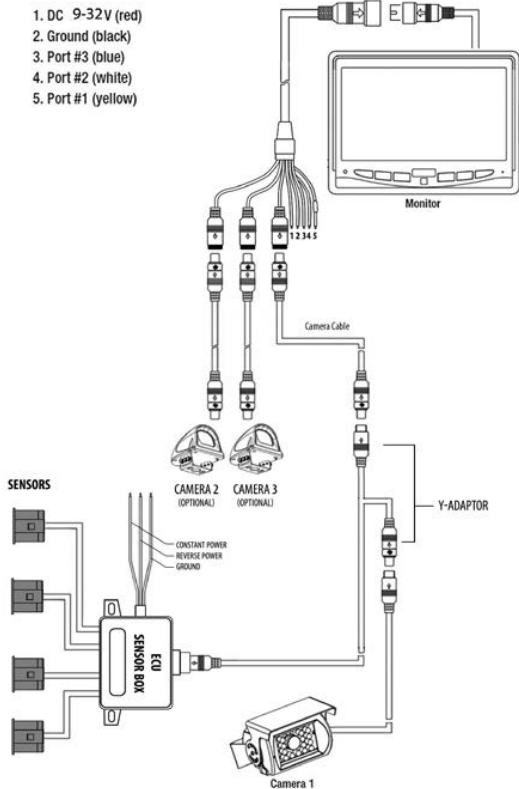


Monitor Operation

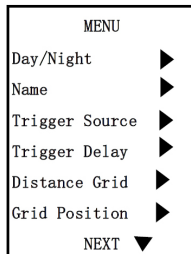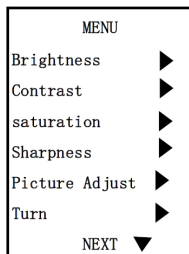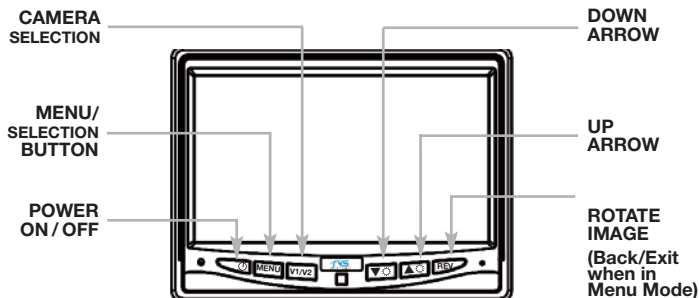

- "Brightness" "Contrast" "Saturation" "Sharpness": adjust image properties
- Picture Adjust: Stretch image horizontally (right/left and left/right)
- Turn: Toggle between mirror/normal image on each individual channel
- Day/Night: Toggle between back-lit buttons and auto dimming
- Name: Change name of each individual channel
- Trigger Source: Toggle channel destination for each trigger
- Trigger Delay: Adjust time delay on each trigger
- Distance Grid: Toggle which channel distance grid lines will display on
- Grid Position: Adjust grid lines
- Auto Power: On: Monitor will automatically turn on when powered. Off: Monitor will only turn on when triggered. Auto: Monitor will follow previous state.
- Reset: Reset settings to factory default

Splitting & Splicing



Installing sun shield: Put shade cover on the display. Installing back cover: Put the monitor with shade cover in the back cover (only for embedded monitor)



Splitting back cover: Hold monitor with 2 hands and detach with fingers, as indicated by arrows. (only for embedded monitor)




Splitting sun shield: Take the monitor with the left hand and detach with right hand as indicated by the white arrow. (see below)




- 1. Red - Power (+)**
- 2. Yellow - Video**
- 3. Green - Mirror / Normal Imaging**
- 4. White - Audio**
- 5. Black - Ground (-)**

Positioning

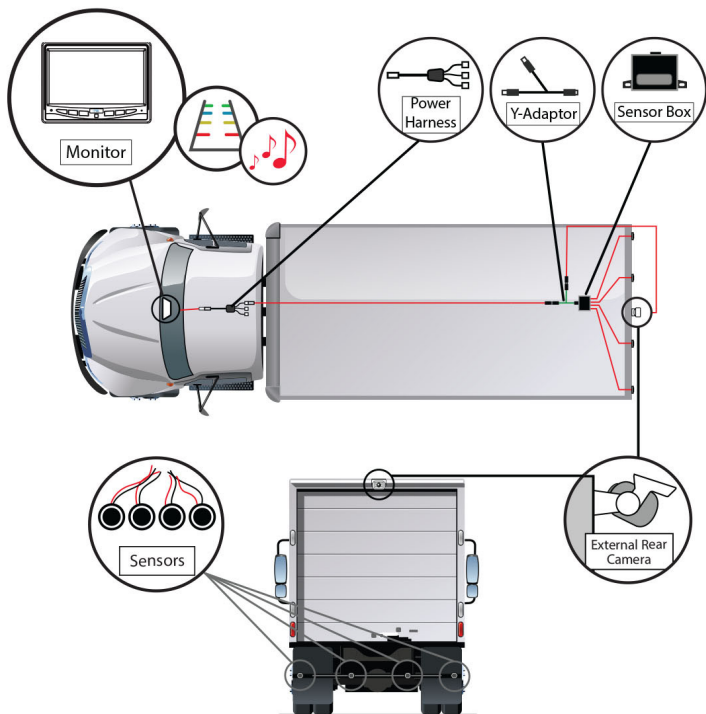

Monitor Dimensions

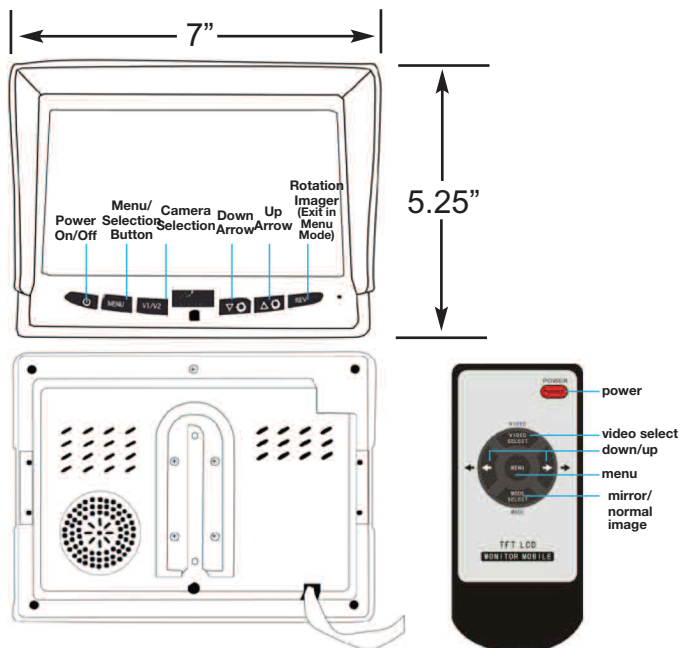


Monitor Specifications

LED Digital Monitor

Screen Size	7"
Dot Resolution	800H x 3 (RGB) x 480V
Display Format	16:9 / 500:1
Display Brightness	400cd/m ²
Viewing Angle	U:50° / D:60° / R:70°
Video Input	3 channel
Video Source	1Vp-p, 75 Ω
Power Supply	DC 9V-32V
Power Consumption	5W
Operating Temperature	-20°C ~ +70° C
Storage Temperature	-30°C ~ +85°C
Overall Dimensions	7"L x 5.25"H x 1"D
Weight	400G
Impact Rating	5G
Dot Pitch	0.1926H x 0.1710V
Sync System	Internal
Video System	Auto NTSC/PAL

Camera Dimensions

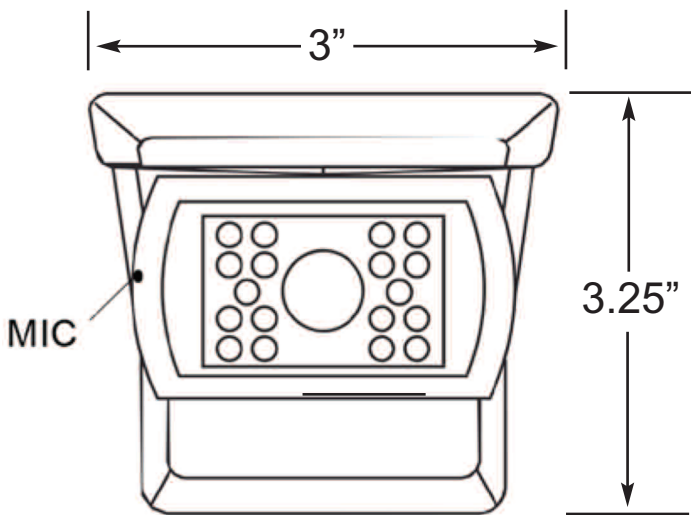

Camera Specifications

Camera	1/3" Sharp® Color CCD
Picture Elements	410,000 pixels
Gamma Correction	$r=0.45$ to 1.0
Image Sensor	620TVL NTSC 811H x 507 V, PAL 752H x 582V
Lens	2.5mm
View Angle	130°
Sync System	Internal Synchronization
Infrared distance	50 Feet (18 Infrared IR)
Usable Illumination	0 Lux (IR On)
Power Source	DC 9V-32V
S/N Ratio	More than 48dB
Electronic Iris	1/50, 1/60-1/100,000sec
Video Output	1Vp.p 75 ohm
IR Switch Control	ACDS Automatic Control
Impact Rating	20G Vibration/100G Shock
Operating Temperature	-40°C~70°C
Storage Temperature	-40°C~85°C

Sensors Specifications

Sensor Specs

Sensor Type: Analog Sensor

Sensor Quantity: 4 Sensors

Sensor Frequency: 40kHz +/- kHz

Waterproof Rating: IP68

Static Capacitance: $2000 \pm 15\%$ pF

Input Voltage max.: 140 Vp-p {at 40KHz}

Decay Time: <1.2ms

Decay Parameter: 20 ± 3 (Admissible parameter)

Echo Sensitivity: >200mV

Horizontal Angle: 51°

Vertical Angle: 62°

Detection Range: 0.22mm (0.08ft) to 2.5m (8ft)

Working Voltage: 10.0 ~ 28.0 VDC

Rated Current (ECU): 60mA max

Wiring Harness: Vehicle Spec. T-Piece

Working Temperature: -40°C ~ +75°C

Storage Temperature: -40°C ~ +90°C

Waterproof Control Module

Normal Voltage: 12 VDC

Operating Voltage: 1.0 ~ 28 VDC

Rated Current: 60 mA

Operating Frequency: 40 +/- 1 kHz

Housing Material: ABS

Housing Color: Black

Working Temperature: -40°C ~ 75°C


Storage Temperature: -40°C ~ 90°C

Waterproof Rating: IP65

Sensor Installation

The width of vehicles vary. It is important to install the Sensors at the appropriate distance and location along the rear bumper or equivalent. Assuming that the width of vehicle is L , then the space between Sensors is $1/4L$ (Sensors must be mounted S1, S2, S3, S4, from left to right).

- Sensors S1 and S4 should be located approximately $1/8L$ from either side of the vehicle. S2 and S3 will be located $1/4L$ from S1 and S4. If the Sensors are mounted on a DOT type bumper, the Sensor locations are determined by the vehicle width (L), not the width of the bumper. 2) Sensors should be mounted at an absolute minimum of 16 inches (40cm) to 32 inches (80cm) from the ground (20 inches (50cm) is a good choice, if available). See Alternate Sensors Mounting Locations, for other options.

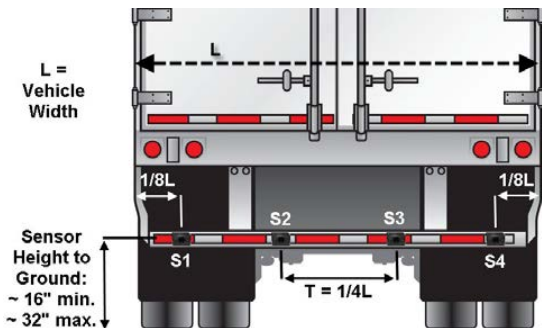

Sensor Installation

Sensor Installation (In-Bumper Flush Mount)

For vehicles equipped with a bumper that can accommodate the Sensors, carefully drill a 25mm hole and insert the Rubber Jacket, properly orientated "UP", in the hole first. Then insert the Sensor, again properly orientated "UP". Depending on the thickness and construction of the bumper, the hole diameter may need to be varied. The Rubber Jacket is designed to seat properly into a 25mm hole with a 1/8 inch (3.2mm) thick metal bumper. If this is not the case, the flanges on the Rubber Jacket must be taken into consideration. It is suggested that a test hole be utilized to confirm a proper fit.




Alternate Mounting


Alternate Sensor Mounting Locations

The system is designed to be installed with all 4 (four) Sensors aligned across the rear of the vehicle, preferably at a height ranging from 16" to 32" from the ground. When the Sensors are installed in a different lay-out (for example to detect a building overhang as shown below), please consider the following:

- Each Sensor detects objects in a circular area approximately 20" in diameter.
- It is recommended that the face of all Sensors should be on the same plane to ensure the accuracy of the system.
- When the Sensors are placed on two different levels (per the example below) install S1 and S4 on the top and S2 and S3 on the bottom of the vehicle.

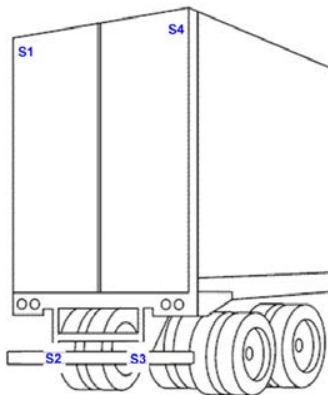

Alternate Mounting

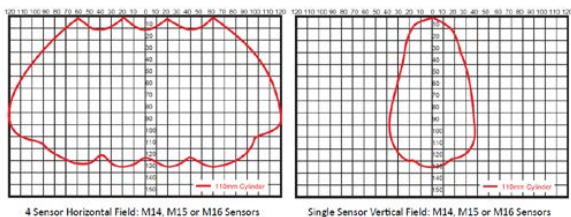

Sensors can also be mounted across the front of the vehicle to detect building overhangs or to detect objects out of view.

NOTE: These sensors are a tool to help the driver. The driver should always know what is in front of or behind them and physically check the area themselves.





Alternate Sensor Mounting Locations

CAUTION: Using less than 4 (four) Sensors across the width of a bumper will create limited coverage resulting in blind zones! It is strongly suggested that these blind zones are mapped out to educate the driver regarding the system limitations.

Detection

Having all four Sensors in line, on the same plane, provides the best result. If you break the Sensor configuration up, for example two on top and two on bottom, you create a bigger gap between the Sensors, causing a large blind zone area. This blind zone area can lead to objects or people being undetected by the Sensors.

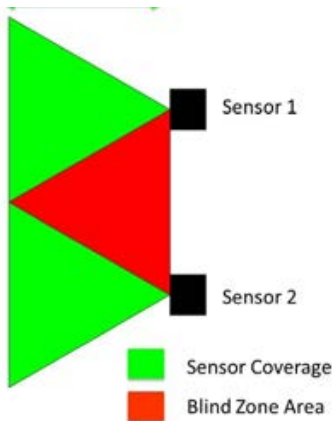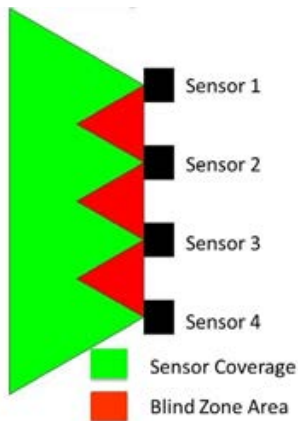

Control Module Installation

1) Depending on the vehicle type, select an appropriate location to mount the water-tight control module on the rear undercarriage of the truck chassis.

Troubleshooting

Monitor Displays Blue Screen & Displays No Signal

- Do a hard reset, unplug all cables and power cables, leave out for 1 minute and then re-connect them.
 - Check to ensure that the connection to the camera is tight.
 - Verify camera cable is plugged into port labeled Backup Camera
 - Verify that the blue positive trigger on power harness is put to power 12v+.
- If the problem still persists, verify that alternate ports work. If alternate ports do not work, remove Blue Trigger wire from 12V+ and select alternate channels.

Monitor Will Not Power-Up (no backlight on power button)

- Check fuse
- Check 12v+ to monitor
- Check ground connection

No Image On Screen

- Verify camera is on correct camera input
- Verify cable is connected to monitor
- Verify camera is connected to cable
- Connect known working camera and cable to monitor.
- Verify Blue trigger is receiving power

Audio on Camera

- Verify chosen camera has audio
Verify volume setting
- Confirm that the Blue audio trigger is connected to 12v+

One Year Warranty

Rear View Safety, Inc. warrants this product against material defects for a period of one year from date of purchase. We reserve the right to repair or replace any such defective unit at our sole discretion. Rear View Safety, Inc. is not responsible for a defect in the system as a result of misuse, improper installation, damage or mishandling of the electronic components. Rear View Safety, Inc. is not responsible for consequential damages of any kind.

This warranty is void if: defects in materials or workmanship or damages result from repairs or alterations which have been made or attempted by others or the unauthorized use of nonconforming parts; the damage is due to normal wear and tear, this damage is due to abuse, improper maintenance, neglect or accident; or the damage is due to use of the Rear View Safety, Inc. system after partial failure or use with improper accessories.

Warranty Performance

DURING THE ABOVE WARRANTY PERIOD, SHOULD YOUR Rear View Safety PRODUCT EXHIBIT A DEFECT IN MATERIAL OR WORKMANSHIP, SUCH DEFECT WILL BE REPAIRED WHEN THE COMPLETE Rear View Safety, INC. PRODUCT IS RETURNED, POSTAGE PREPAID AND INSURED, TO Rear View Safety, INC. OTHER THAN THE POSTAGE AND INSURANCE REQUIREMENT, NO CHARGE WILL BE MADE FOR REPAIRS COVERED BY THIS WARRANTY.

Warranty Disclaimers

NO WARRANTY, ORAL OR WRITTEN, EXPRESSED OR IMPLIED, OTHER THE ABOVE WARRANTY IS MADE WITH REGARD TO THIS Rear View Safety, INC. Rear View Safety, INC. DISCLAIMS ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE AND ALL OTHER WARRANTIES IN NO EVENT SHALL Rear View Safety, INC. LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL, OR PUNITIVE DAMAGES OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS.

Disclaimer

Rear View Safety and/or its affiliates does not guarantee or promise that the user of our systems will not be in/part of an accident or otherwise not collide with an object and/or person. Our systems are not a substitute for careful and cautious driving or for the consistent adherence to all applicable traffic laws and motor vehicle safety regulations. The Rear View Safety products are not a substitute for rearview mirrors or for any other motor vehicle equipment mandated by law. Our camera systems have a limited field of vision and do not provide a comprehensive view of the rear or side area of the vehicle. Always make sure to look around your vehicle and use your mirrors to confirm rearward clearance and that your vehicle can maneuver safely. Rear View Safety and/or its affiliates shall have no responsibility or liability for damage and/or injury resulting from accidents occurring with vehicles having some of Rear View Safety products installed and Rear View Safety and/or its affiliates, the manufacturer, distributor and seller shall not be liable for any injury, loss or damage, incidental or consequential, arising out of the use or intended use of the product. In no event shall Rear View Safety and/or its affiliates have any liability for any losses (whether direct or indirect, in contract, tort or otherwise) incurred in connection with the systems, including but not limited to damaged property, personal injury and/or loss of life. Neither shall Rear View Safety and/or its affiliates have any responsibility for any decision, action or inaction taken by any person in reliance on Rear View Safety systems, or for any delays, inaccuracies and/or errors in connection with our systems functions.



**If you have any questions
about this product, contact:**

Industrial Products

5717 Salmen Street New Orleans, LA 70123
industrialproducts.com | sales@industrialproducts.com
888-243-3339

**BETTER CAMERAS. BETTER SERVICE.
IT'S OUR GUARANTEE.**